


HD22 OB VAN : 18 Cameras

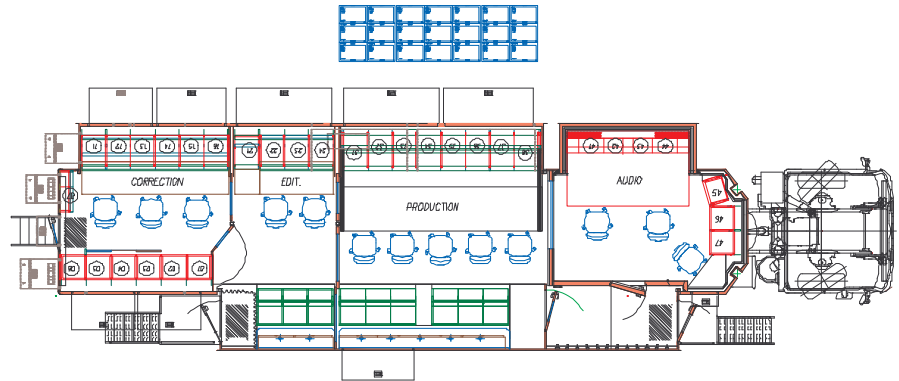

Customer :

VIDEO

Pal ; SD-SDI (4:3 – 16:9) ; HD-SDI (1080i/720p)

RTBF

Up to 18 (24) LDK6000 (3 levels tallies) of which 4 SLSM (LDK6200), 3 D-HF (Lifetools)
Video Mixer : MVS-8000A (Sony) 4 ME, 68 In, 24 Out, 4 keys / ME multiformats, library 444 frames

Type :

Effects : MVE 8000A 3D-4CH Fill&Key (Sony)

**TRAILER
18 CAMERAS**

Main desk : MKS8011-3ME + 1 Aux

Aux desk : MKS9011-1ME + 1 Aux

Matrix : HDS-X5800 165X272 (Sony) ; Clean-Dirty (SD&HD) 4X4 (Sony) ; 32 data ports (Leitch)

Converters : 7 Up, 6 Down, 12 synchronizers (Leitch), interfaces

Mesurement : 5 Rasterizers WVR7000 (Tektronix)

Function :

Utilibox : Flashlink (Network Electronics) 3X each 8 SD/HD-SDI + A/D & D/A (4 AES + 8 CH analog) embedded (4 RS422, 6 GPI-I + 6 GPI-O), 1 Eth100

Up to 6 VTRs

Up to 6 LSM XT2 (6CH HD-SDI) in network. Network controled by Ipdirector

Archives up to 3 Xfile2

Record in DVD

Demod DVB-T, -S

Remotes, graphics, touchscreen, editing

WiFi network on stage with telephony

KVM switch Avocent : 64 UC and 16 users

**HD OB VAN
Multiformats**

AUDIO

40 bit floating-point ; SRC 44,1 – 48 – 96 kHz

Primary console Aurus-48 strips n-1 (Stagetec)

Secondary Console 01V96 Madi-Adat (Yamaha)

Monitoring 5.1 Genelec + RTW30900

Reverb TC6000, effects SPX2000 (Yamaha)

Interfaces Sono console, up to 2x 48 tracks, 7 embedders multi formats, 6 deembedders

Peripherals : DAT, DVD, CD (1 + 1 Rec) 2 MacMini (OnTheAir & Sound Studio)

INTERCOM

Matrix Riedel (168x168) + ISDN

WideBand Overline

Service 3 networks-12 belt-packs

VAN SPECIFICATIONS

TOTAL Weight: 33 tons

Total Length: 16 m - Height: 4.0.m (Length without tractor: 13.85 m)

Width, Closed: 2,50 m - with opened extensions: 6 m

POWER SUPPLY: 3 Phase Supply

TOTAL POWER: 3x 40A on CEE IP44 3p+N+T 400V 125 A

AIR CONDITIONING: DAIKIN Air Conditioners