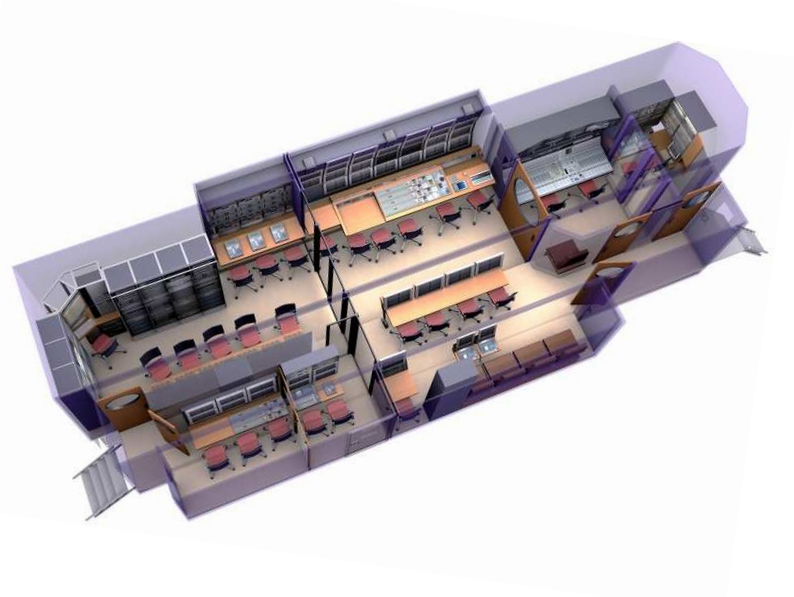



CAR 11 – OB VAN – HIGH DEFINITIONCustomer :**AMP**Type :**TRAILER 38 Tons
20 CAMERAS**Function :**HD OB VAN
Multiformats****VIDEO**

Video Mixer : MVS-8000g HD/SD (Sony) 4 ME, 68 In, 48 Out, 8 linear keys, still or live library
Effects : MVE 9000 (Sony)
Main desk : 4 ME, 32 knobs
Aux desk : 2 ME, 16 knobs
Matrix : Multistandards HD-SDI / SD-SDI, 252 x 384 (Sony)
Monitoring : LCD 24" SD-SDI / HD-SDI ; multi-channel display.
20 Sony HDC 1500 digital cameras ; HD / SD ; 4:3 / 16:9 ; optical fiber cable.
Up to 10 VCRs and 8 x 6 channels servers.
Seats for 6 to 10 slow-motion operators
2 SD / HD bi-channels character generator
Down-converters and Up-converters
Cross-converter
Multiformat Synchronizer
Embedor / Desembedor
Measurement : WFM7000 (Tektronix)
4 Sat and UHF Demods

AUDIO

Primary console Studer Vista 8 : 52 faders, 84 Mic inputs, 48 line inputs, 104 analog outputs, routing 184 x 184 AES
2 Dolby E and D decoders
MADI and ethersound interfaces
Secondary Consoles 2 x Yamaha DM1000 : 16 faders, 16 Mic inputs, 8 AES inputs/outputs, ethersound interface
Monitoring 5.1 Genelec and Dynaudio with Trinove processor
Audio server, CD player, TC-Electronic M6000 multi-effect
PC Soundforge editing

INTERCOM

Matrix Riedel (120 x 120)
6 channels RTS intercom
Hybrid phone
RNIS and IP Codecs
HF intercom
Riedel speaker box
HF earphone

VAN SPECIFICATIONS

TOTAL Weight: 38 tons
Total Length: 16,5 m - Height: 4.0.m (Length without tractor: 13.9 m)
Width, Closed: 2,50 m - With all extensions opened : 5,46 m – With left extension closed : 4,75 m – With left and right (VIP) closed : 3,89 m
POWER SUPPLY: 2 x 3 Phase Supply 63 A
AIR CONDITIONING: DAIKIN Air Conditioners